`xtem` — TEX-Menu for X Window System

G. Lamprecht, W. Lotz, R. Weibezahn*
IWD, Bremen University†

Version 6, January 1997

We developed a user interface that allows you to prepare documents using TEX/LATEX more comfortably: `xtem`. With `xtem` you can edit and format at the same time, you can use a spell check and preview your layout, and you can do many other things. A list of all possibilities that are available is given in Figure 1 and may also be seen from Table 1.

The program is written in Tcl and has been developed on a SUN SPARC 10 under Solaris 2.6/x86. By now `xtem` is installed on several other computer platforms: Linux, IBM RS6000/AIX, SGI Indigo, SGI Challenge, SGI Irix, Sun OS4, Sun SPARC10 Solaris 2.5, DEC 3000, DEC 5000/Ultrix, HP Apollo Domain/HP-UX, HP 9000/HP-UX. At least one installation was done in using Open Windows 3.0 in place of X11R4/5. Thus `xtem` can be expected to be implementable without problems on other Unix-computers.

`xtem` allows for **different languages**: Calling the program the user can decide which language to use. Menu and online helps will appear in the chosen language. Right now English and German are available (Figures 1, 2). Further languages can be added easily by providing `xtem` with pure text files.

`xtem` is **self explanatory** and easy to use. Without hardly any knowledge of LATEX and the operating system it enables users to edit text, including tables (after only a brief instruction). This is provided by extensive explanations and examples for the LATEX-syntax. LATEX commands can be searched for in an alphabetical list or in lists grouped by contents. Figure 9 shows a window with the syntax description and examples for the `footnote` commands, all syntax helps are presented using hypertext. During an edit-session you can look at the syntax of a LATEX command and can copy the examples into the text being edited with the known mouse functions.

In addition interactive context sensitive help can be activated by the right mouse button for every field of `xtem`.

A click with the left mouse button executes a menu function. For every menu item you can select amongst several pre**settings**. Using the middle mouse button (with the cursor on a menu item) a list of available presettings will be displayed. They can be selected by a double click of the left mouse button. Figure 3 shows the available presettings of the `TeX settings` field.

In this menu you can do all setting concerning TEX runs:

- format selection,

*e-mail: `weibezahn@iwd.uni-bremen.de`, WWW: `http://ftp.iwd.uni-bremen.de/xtem/xtem_texmenu.html`
†Institut für wissenschaftliche Datenverarbeitung, Universität Bremen, Postfach 330 440, 28334 Bremen, Germany

- memory size (eventually),
- the maximum number of TEX runs (to make consistent cross references etc.; there will be no unnecessary TEX run by checking the .aux-files!) and
- settings, whether a transcript analyze is to be done automatically after the TEX run or not and in which form.
  This analyze gives a short list of error messages and warnings (including "overfull boxes" and "underfull boxes"). Clicking at on of these error messages creates an edit window into which the file concerned is loaded. The line(s) in which TEX located the error are displayed inversely and the cursor is put as close as possible to the error position (line and column), see figure 4.
  Error analyzing can also be started by clicking at "transcript file ..." in the main menu.
- Furthermore you can set in this menu whether the hyphenations done at this TEX run are to be displayed or not.
  You can move this list by simple mouse click into a file containing checked hyphenations (this file is a pure text file and can be edited by the user); at future TEX runs only those hyphenations are displayed, which are not found in this file.

The index preparing program (e.g. `makeindex`) is started automatically after TEX run(s) if necessary (i.e. when the .idx-file has changed during the TEX run). Whether the bibliography preparing program (e.g. `bibtex`) is started automatically (in case of 'undefined references') after TEX run(s) or not can be set by the user in the bibliography setting menu.

Figure 6 shows the menu to select/input directories and files, in addition you can also create new directories with this menu.

Figure 7 shows the presetting of the available **printers**. Specifications for the printer drivers (like TEX zero point, dpi etc.) are automatically set as specified by the TEX administrator. The user can change these options but usually should not do so.

For printing several comfortable features have been developed. You can choose — from a menu that comes up automatically after clicking the print function in the main menu — whether you want to print: "absolute" or "relative", even or odd or all pages, several pages in reduced size on one page, "a5booklet". You can also specify whether the print file should be permanent or temporary and the number of copies (a maximum number is set by the TEX administrator).

In a network there might be many printers available. To find quickly the appropriate printer in the list of printers, you can search selectively. You can reduce the number of printers included in the list of printers by specifying criteria like format of the paper, printer resolution (dpi), location of the printer (Figure 8). The number and the kinds of criteria are set by the TEX administrator in a file of presettings.

These presetting files available for each menu function are designed as "open lists". They can be easily adjusted by the TEX administrator to meet local requirements. All our presetting files are enclosed in the `xtem` installation package.

We designed `xtem` as smart as possible to avoid "conflict situations". For example, when you start a spelling check program that enables you to modify possible mistakes (e.g. ispell), `xtem` makes sure that you do not have an open edit window (started by `xtem`) at the same time. If an edit window is open `xtem` asks whether you want to run the spell check "at you own risk".

button	**left mouse button (execution)**	**middle mouse button (presettings)**
exit	exit `xtem`	unused
help	first information to `xtem`	unused
clear text field	clean up the output text field at the bottom	unused
reset to defaults	reset to the values given by the TEX administrator	unused
unlock (optional)	unlocking of the (automatically) locked buttons (for "hackers" only)	unused
cancel	cancel an active program (e.g. `tex` run, `makeindex` run)	unused
xtem settings	select another form for execution of commands/programs etc.	unused
personal settings	you may save and load your personal (current) settings	unused
LaTeX syntax	the (LATEX) syntax helps are presented	unused
local news	display informations provided by the TEX administrator	unused

Table 1: Summary of the facilities of `xtem`.

button	**left mouse button (execution)**	**middle mouse button (presettings)**
file/directory selection	select/input & change the directory select/input of the main file name select/input a file name for editing	unused
edit	call the editor with the displayed file (if you use LaTeX the syntax helps are presented at the same time)	select an editor (`emacs`, `vi`, ...); select whether the editor is to be called in background or in foreground
quick&dirty	quick TeX run with the text passed by "mouse grab" and previewing of the result of the TeX run this button can be modified with "Shift": quick TeX run is then done with "edit file" instead of "mouse grab"	unused (is set together wit the TeX format presettings)
TeX format etc.	call the program `tex` with the displayed TeX format and the displayed main file	select the format (`tex`, `latex`, `slitex`, ...); eventually select the memory size (`normal/bigtex`); select the max. number of `tex` runs (references!); settings to the transcript analyze (after TeX run); settings to the display of hyphenations done by a TeX run
preview	starts previewing with the displayed main file	select a previewer (`ghostview`, `xdvi`, ...); select whether the previewer is to be called in background or in foreground; setting of the format for preview and printing; if necessary: change the options used by the preview program
print	printing the displayed file; starts the "printing menu": you may specify page selection (even/odd pages, pages from ... to ..., 2/4 pages reduced on 1 sheet, `a5booklet`, number of copies, ...; after generating the print file: decide whether file → printer or not; this button can be modified with "Shift": printing is then done directly without call of the "printing menu"	select the combination: printer – printer driver – paper format etc.; setting of the format for preview and printing; reduction of the printer list by means of selection criteria; if necessary: modification of the printer (driver) options
clean up	select the file suffixes of the files to be removed; you get a list of file names to be removed; if you click names from this list, these files will not be removed	unused

Table 1: Summary of the facilities of `xtem` (continued).

button	**left mouse button (execution)**	**middle mouse button (presettings)**
spelling check (optional)	starts the spelling check program with the displayed file	select the spelling check program and the dictionary (language); if necessary: modify the program option string
syntax check (optional)	starts the syntax check program with the displayed file	select the syntax check program and its verbose mode; if necessary: modify the program option string
make index (optional)	starts the index preparing program for the displayed file	select the index preparing program; select whether the index preparing program is to be started automatically after TEX run (if necessary) or not; if necessary: modify the program option string
bibliography (optional)	starts the bibliography preparing program with the displayed file	select the bibliography preparing program; select whether the bibliography preparing program is to be started automatically after TEX run (if necessary) or not; if necessary: modify the program option string
additional programs (optional)	select a program from the list; at our installation there are programs for file converting such as: 'German umlaute' expanding → 'TEX' or 'German TEX' convention and vice versa, 8 bit ISO Code ↔ IBM PC code, Unix format ↔ DOS format, tabulator expansion, `xfig`, ...	unused
protocol file (optional)	display the contents of the indicated protocol file	select the protocol file (...`.log`, ...`.ilg`, ...); select the mode for displaying (`tla` (=transcript analyze), `cat`, `pg`, `emacs`, `vi`, ...)

Table 1: Summary of the facilities of `xtem` (continued).

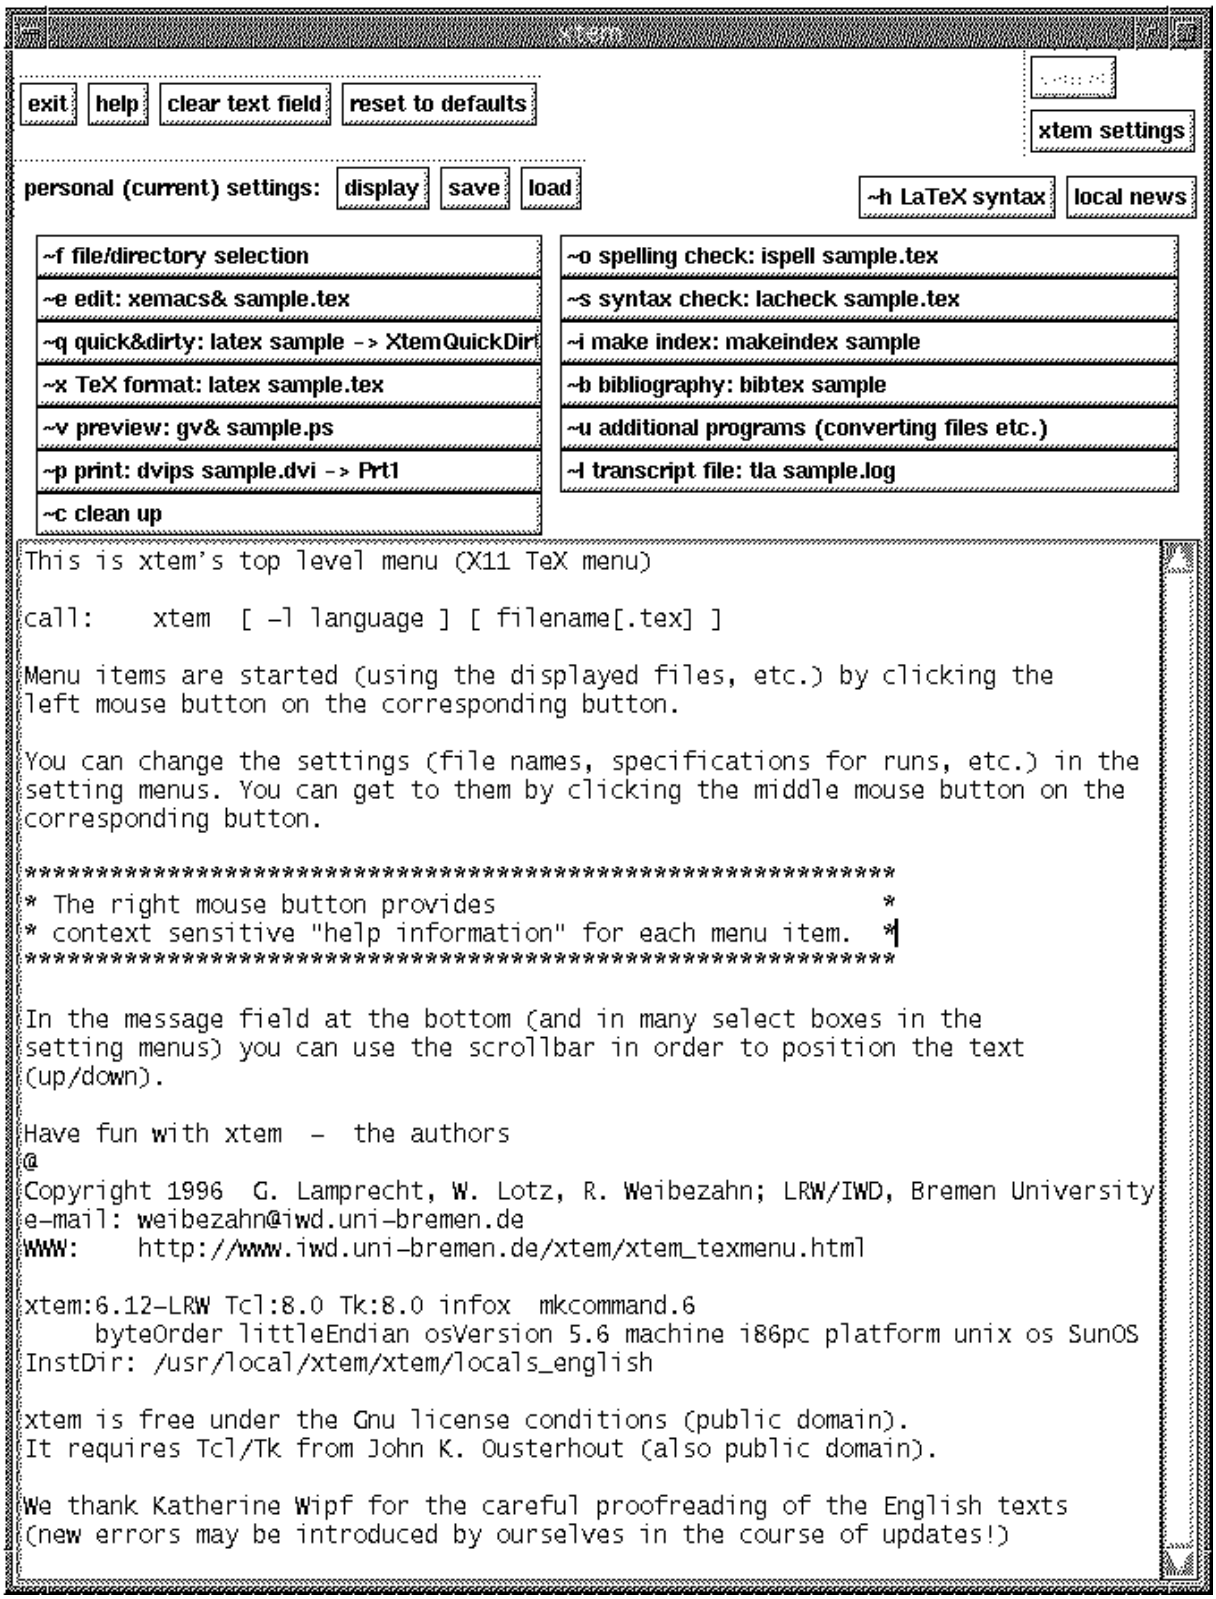

Figure 1: the main menu of `xtem`, after clicking at "help"

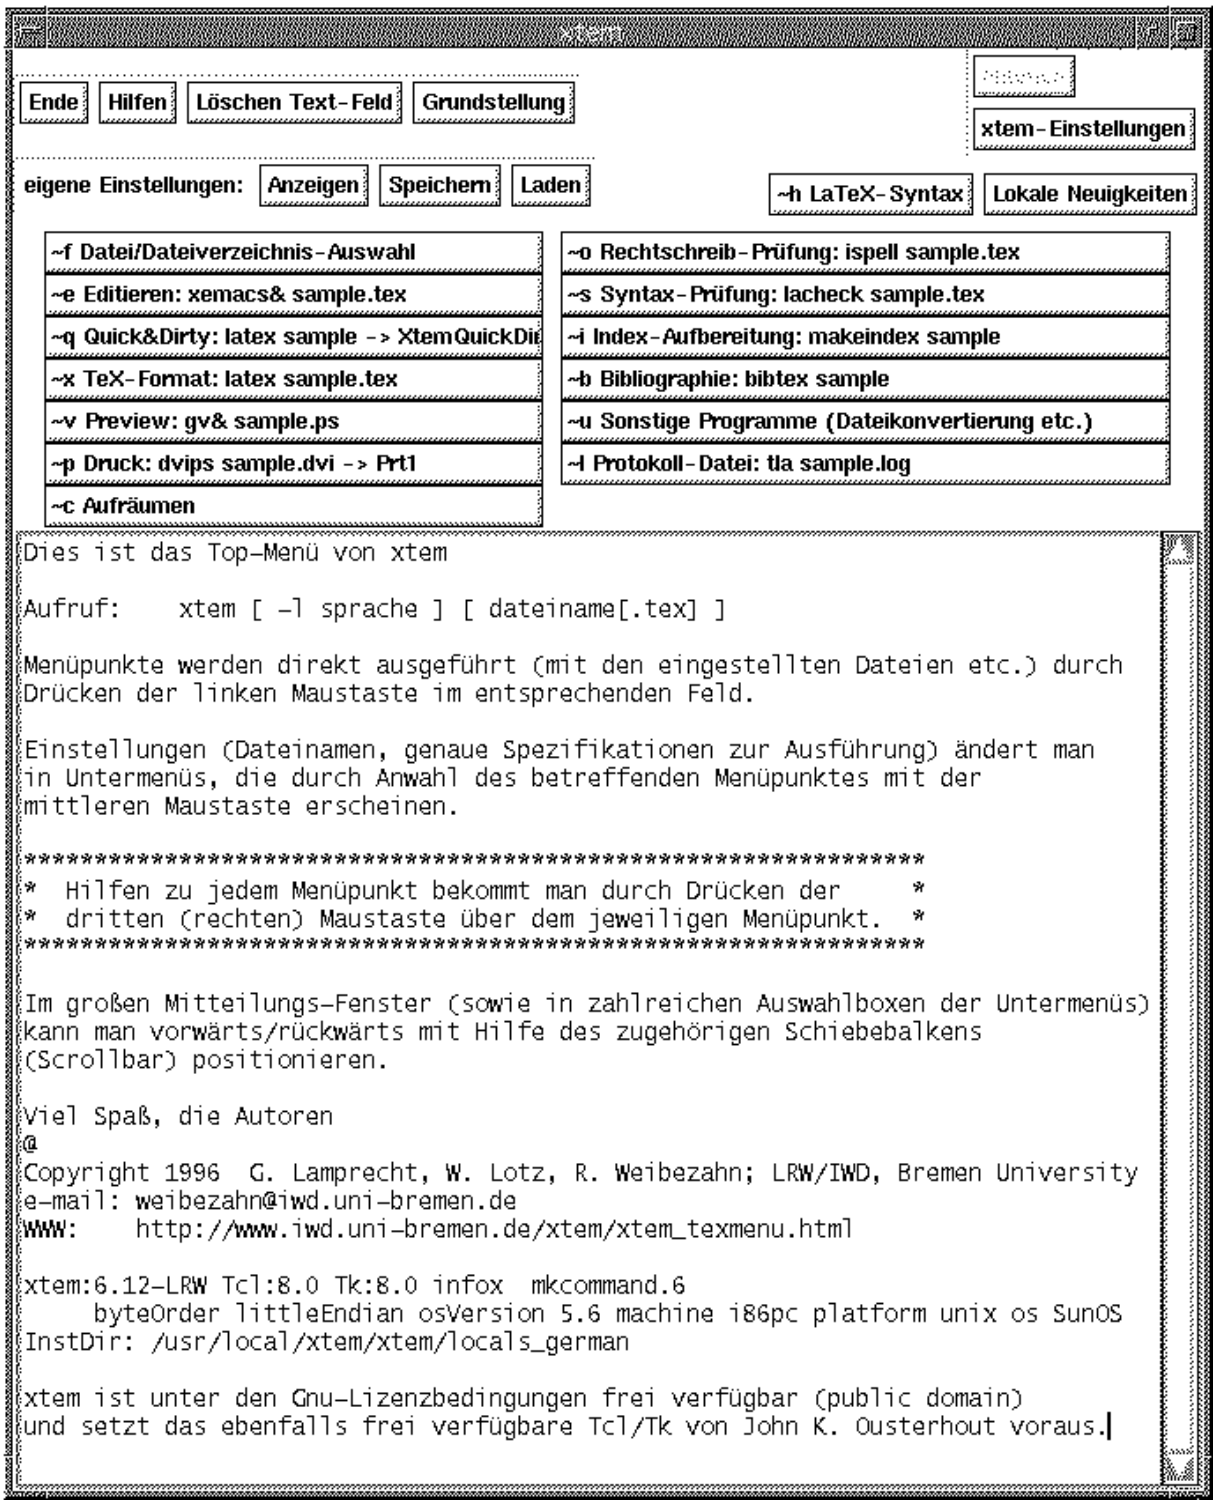

Figure 2: the main menu of `xtem` in German mode

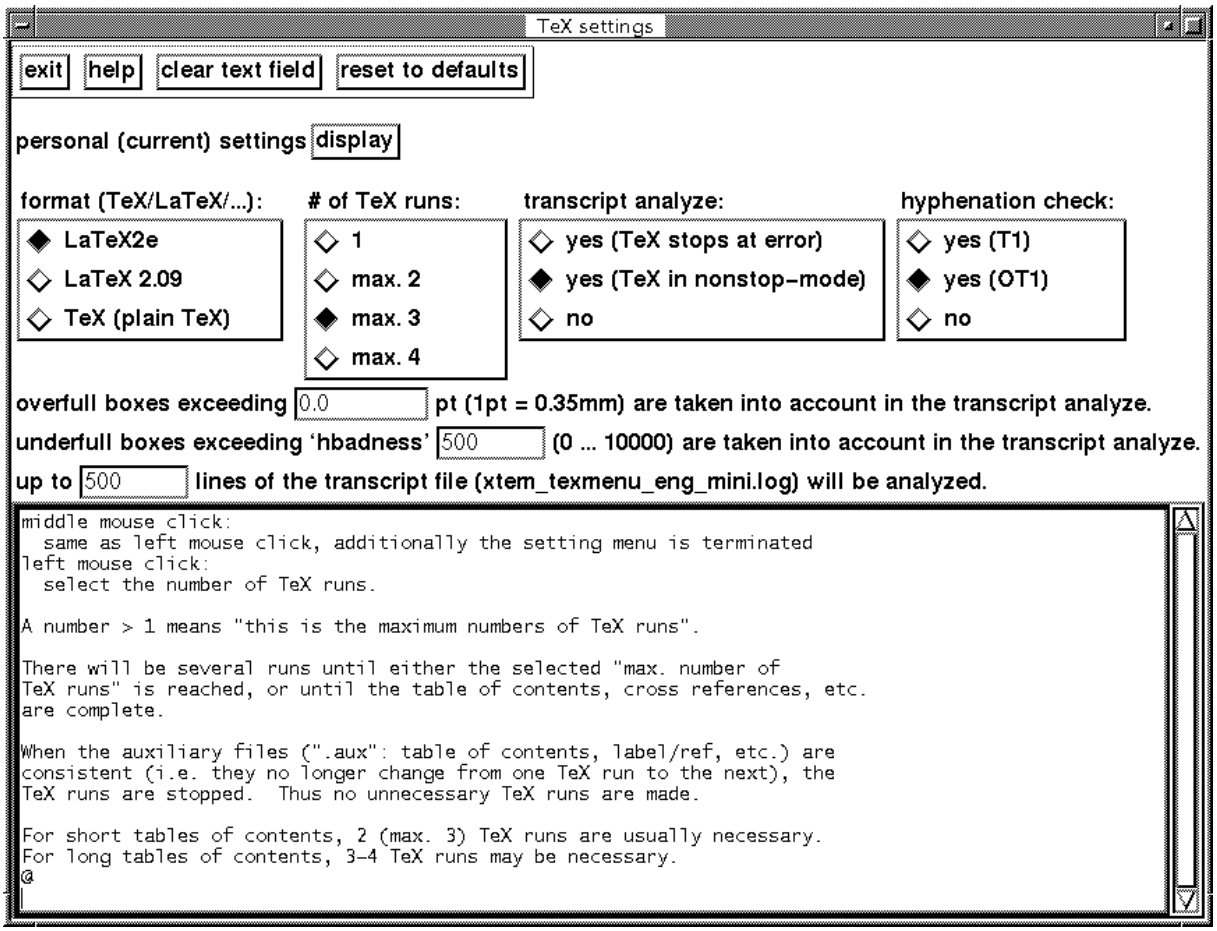

Figure 3: the TEX settings menu, after demanding helps to the "number of TeX runs" (right mouse click at "# of TeX runs").
If necessary (i.e. if the setting file `texsiz.vst` has more than one entry), in this menu automatically one more select box is generated in which you can select the TEX memory size.

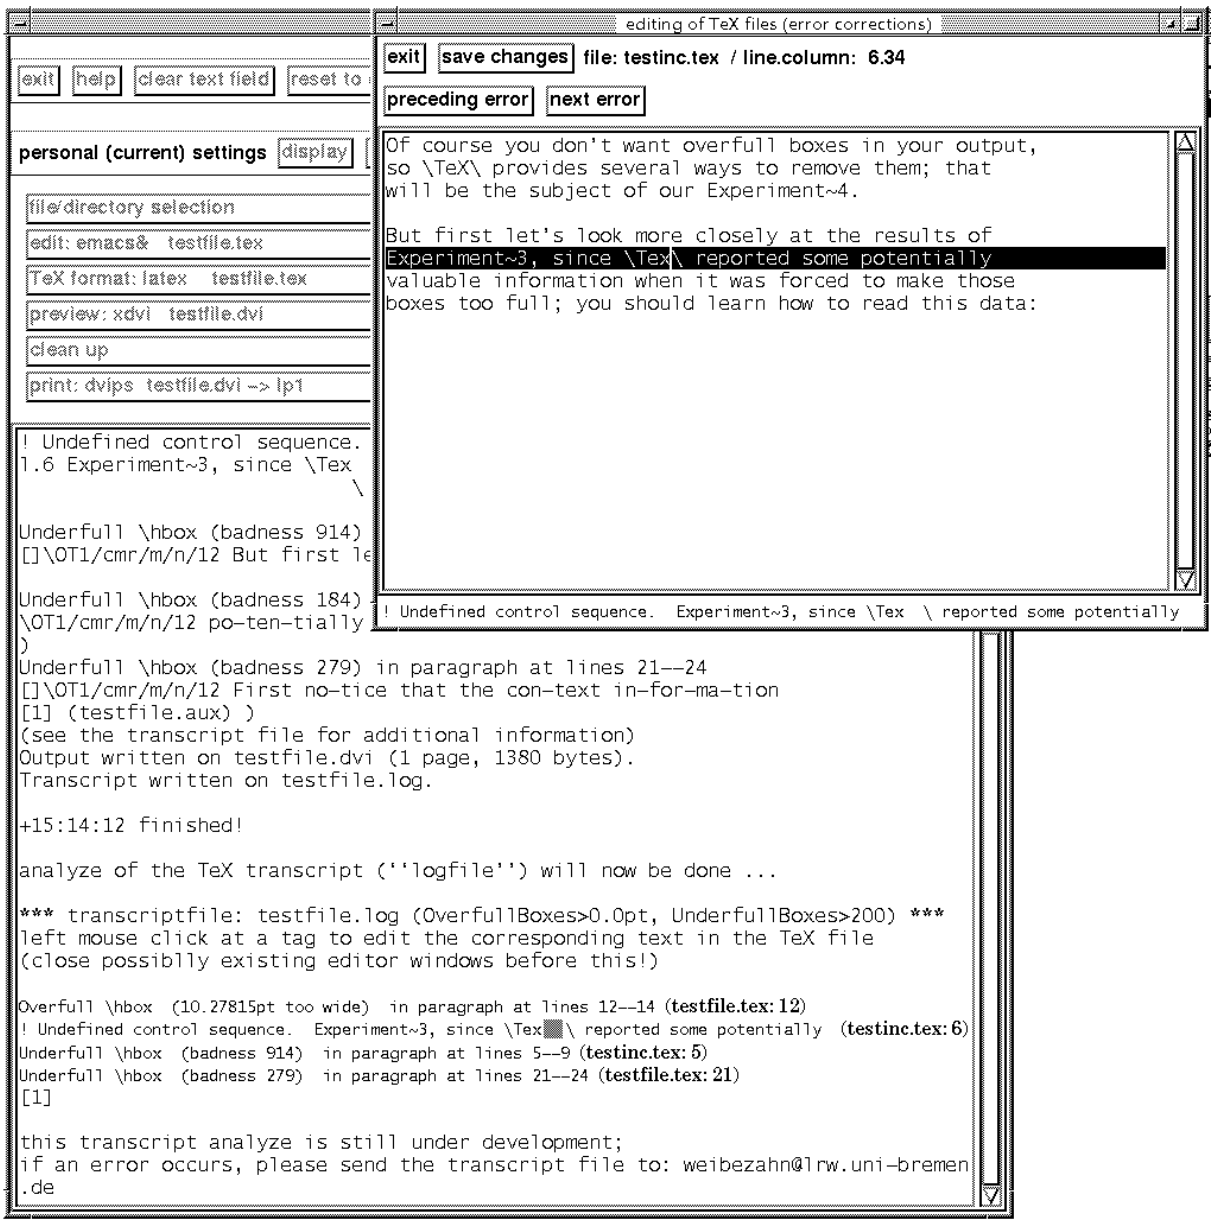

Figure 4: Analyze of the transcript file was done after the LaTeX run (see TeX settings menu, figure 3) and the second of the generated errors/warnings was clicked at. By this the editor window was opened and filled with the text-file: the erroneous line is inverted and the cursor is positioned at the error position. Take into aspect that a value of 200 was set in the TeX settings menu for the underfull boxes to be taken into account!

Figure 5: According to the settings (see TEX settings menu, figure 3) after the LATEX run the hyphenations are looked for. 10 hyphenations are found, 5 of them are displayed; the other hyphenations were formerly inlcuded in a file with "hyphenations already checked to be correct". The hyphenations currently displayed can easily be added to this file by clicking at "yes". If necessary the user can directly edit this file.

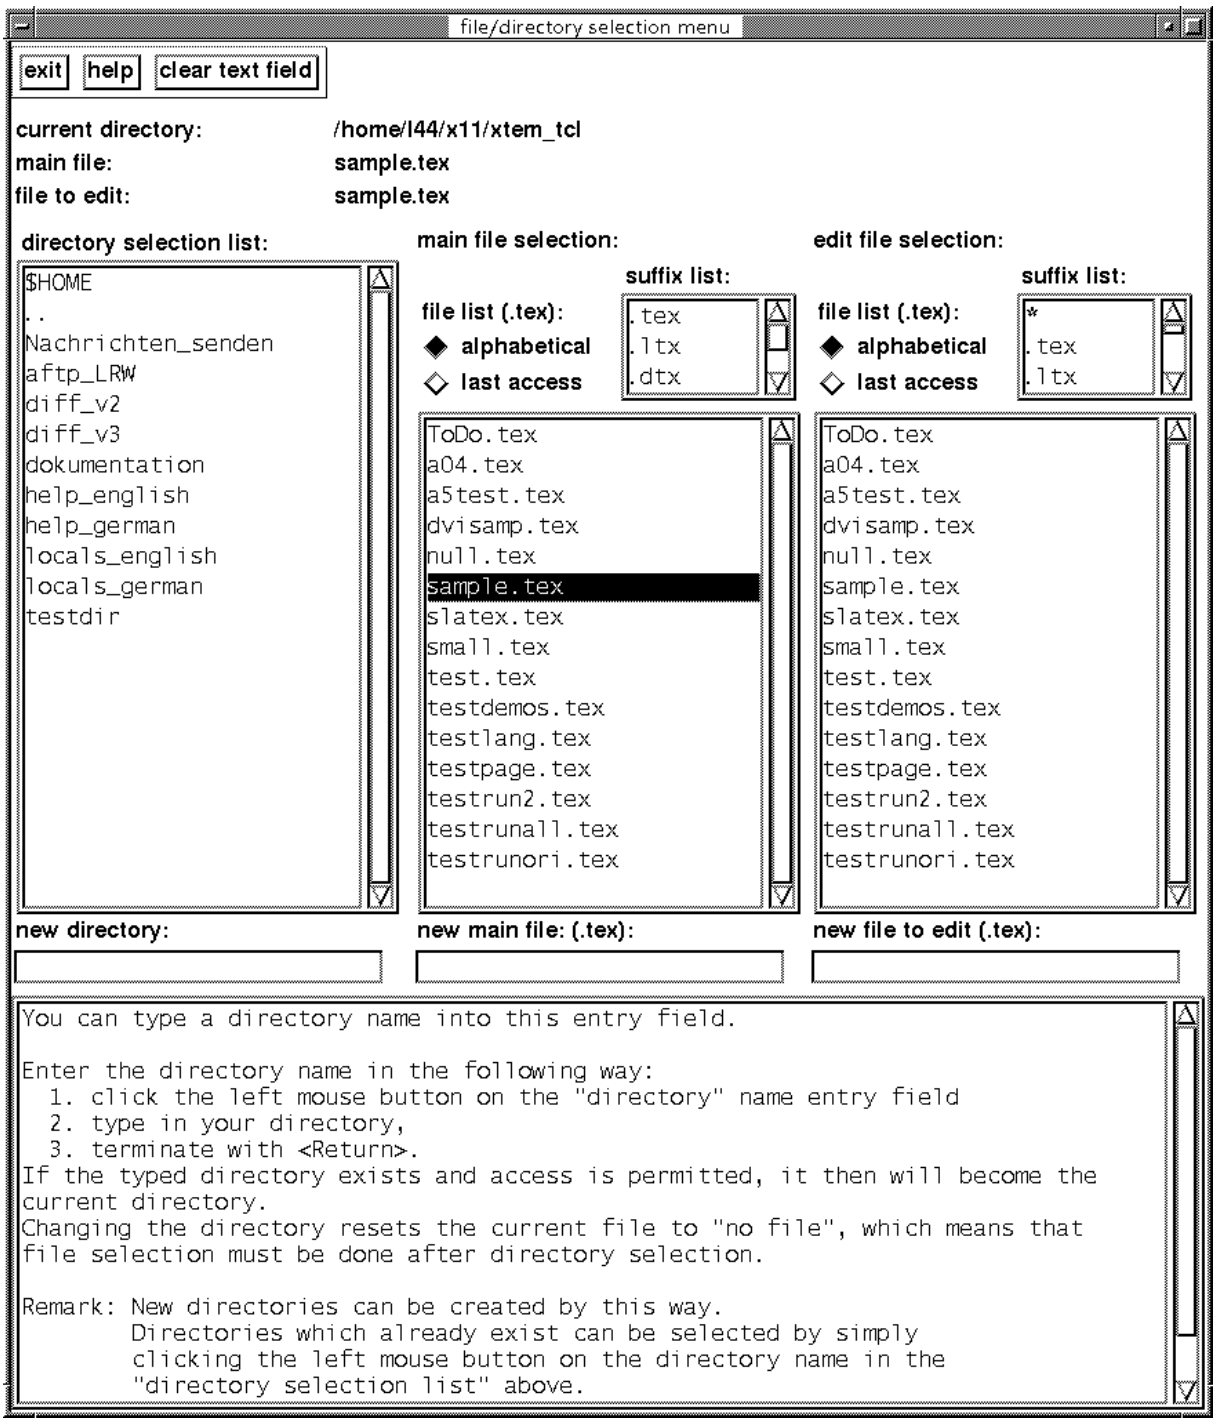

Figure 6: the menu for the selection of files and directories, after demanding helps to input a new directory (right mouse click at “new directory”).

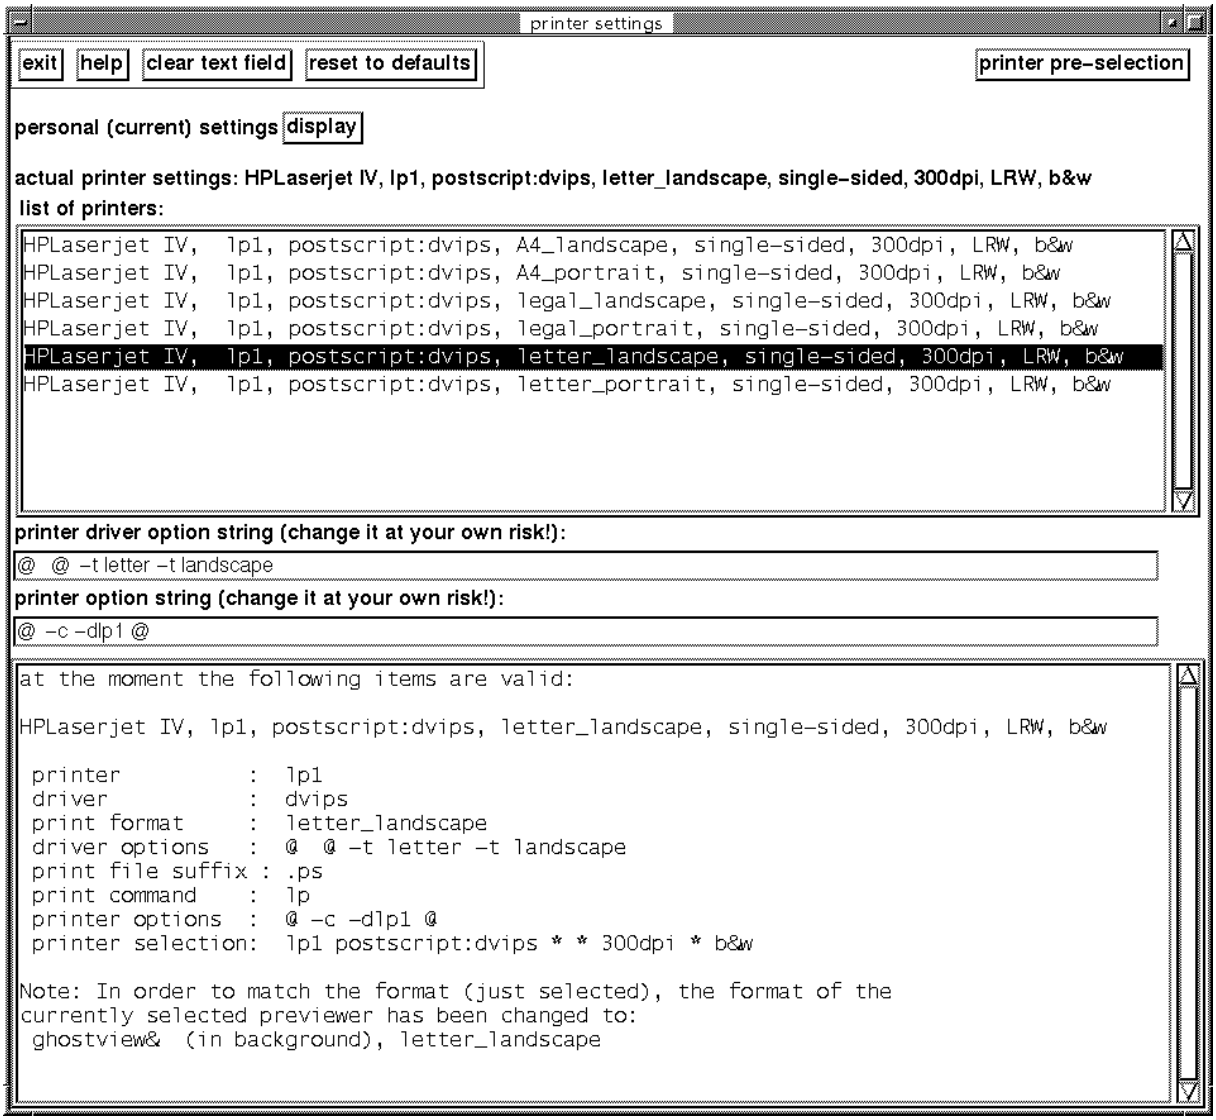

Figure 7: the printer settings menu, after selection of printer `lp1` with postscript/printer driver `dvips` and format landscape (the format was set for the previewer automatically too).

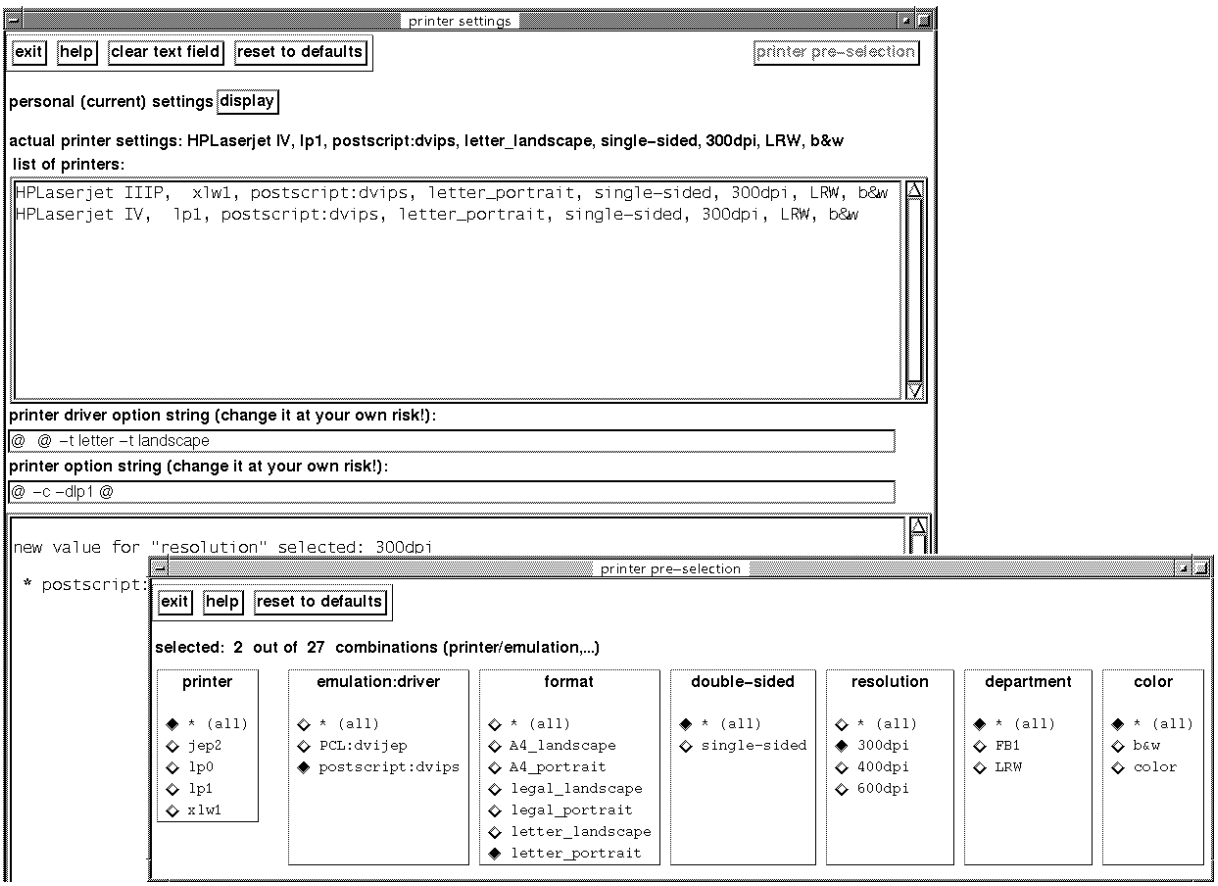

Figure 8: the printer pre-selection menu, after selection of postscript, letter_portrait and 300dpi.

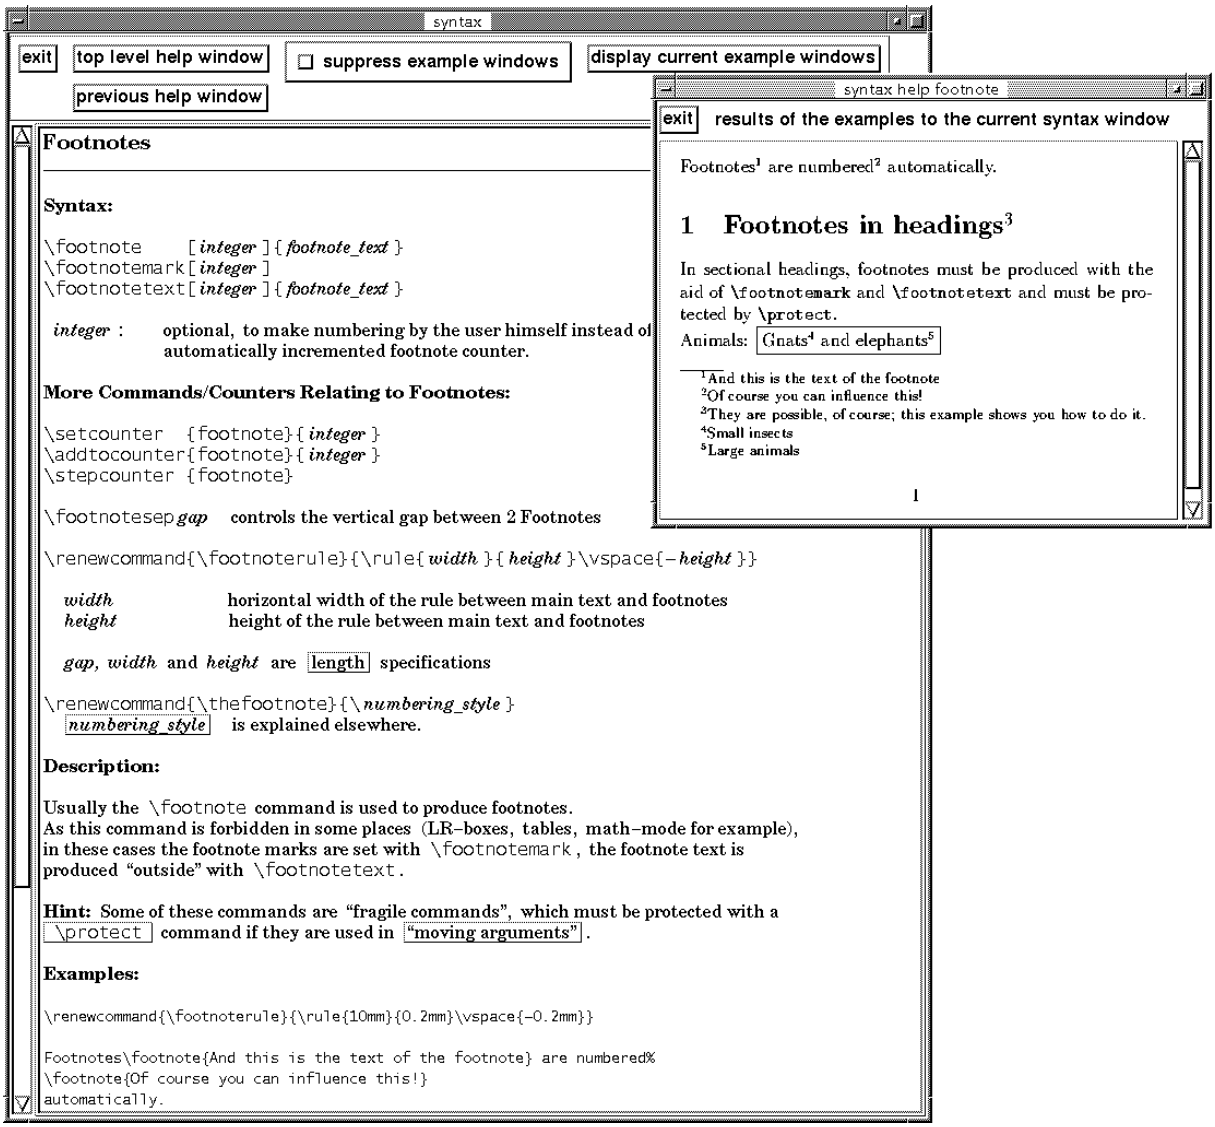

Figure 9: the LaTeX syntax helps.

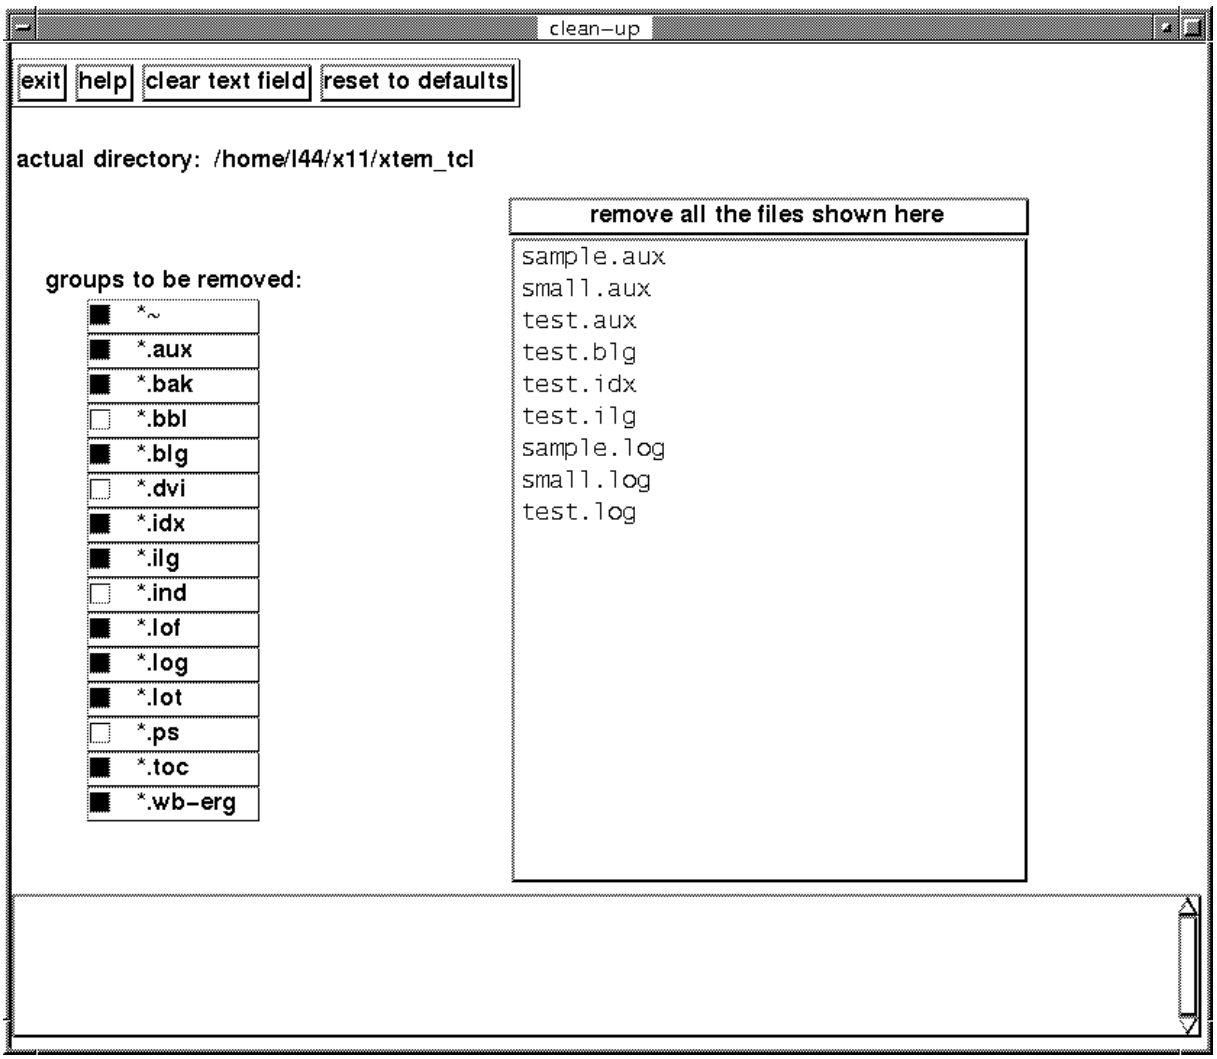

Figure 10: clean up.

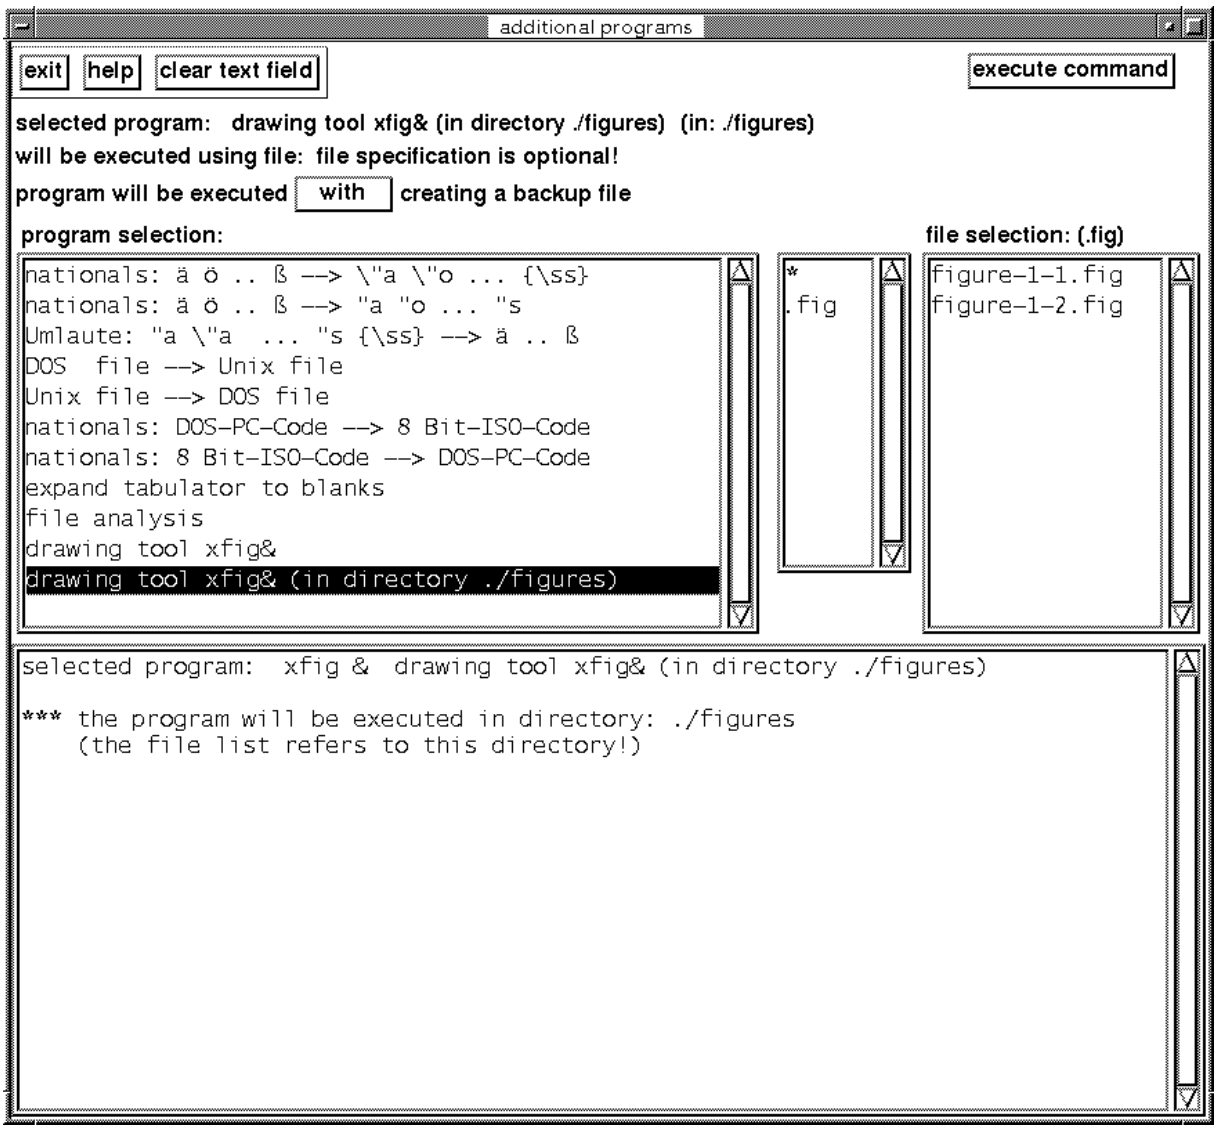

Figure 11: the menu for execution of additional auxiliary programs

Acknowledgment

We want to express our thanks to many `xtem` users, who gave us valuable hints and suggestions.

Especially we thank Thomas Feuerstack, Helmut Jarausch, Julien Maillard, Steve Pershing, Peter-Klaus Schilling Torsten Schuetze, Oliver Stenzel, Joel D. Young, and Michael Zuther, who has accompanied our work in particular manner by positive critics, suggestions and testing.

We thank Katherine Wipf for the careful proofreading of the English texts (new errors may be introduced by ourselves in the course of updates!)

Basis for the use of `xtem`:

- Hardware: X11 screen (black&white or colour),
  keyboard, 3 button mouse.
- Software:
  - Unix system,
  - Tcl version 7.4, 7.5, 7.6 or 8.0 with Tk by J. Ousterhout and TclX (extended Tcl) by Mark Diekhans and Karl Lehenbauer
    (public domain, available by `aftp` — see `xtem_texmenu.README`).
- Application software:
  - `xtem` available under GNU licence conditions
  - from: `aftp` server of IWD: `ftp.iwd.uni-bremen.de`
    (login as `anonymous` with RFC conform e-mail address for password).
  - files: `/pub/tex/xtem/xtem_texmenu_6ger.ps.gz` (German description)
    `/pub/tex/xtem/xtem_texmenu_6eng.ps.gz` ((this) English description)
    `/pub/tex/xtem/xtem_texmenu.6.18.tar.gz` (or version newer than 6.18)
  - or via WWW: `http://ftp.iwd.uni-bremen.de/xtem/xtem_texmenu.html`
  - from the `aftp` server of IWD or via the WWW-page you can also get `xtem` running with older Tcl (Tcl 7.3: `xtem_v4`)